

USR602 & USR604

Heavy Duty USB to Serial Converters

With Port to Port Isolation

- ✓ 2 kV Port to Port Isolation
- ✓ ESD Protection - 8 kV Contact, 15 kV Air
- ✓ Rugged Metal Case & High Retention USB Connector
- ✓ Wide Operating Temperature (-40 to 80°C)
- ✓ Redundant Power Inputs
- ✓ Modbus ASCII/RTU Compatible
- ✓ DIN Rail & Panel Mounting Options



These industrial grade, isolated, USB to serial converters allow you to add two or four RS-232/422/485 ports to your USB only PC. Built to rugged specifications, the USR602 and USR604 offer 2 kV Port to Port isolation. This means that your upstream PC is isolated from the downstream serial devices and the downstream serial devices are isolated from each other and the upstream PC. Additional features such as a heavy duty metal enclosure with panel and DIN Rail mounting options, high ESD protection, shock and vibration testing, and wide operating temperatures, make them ideal for use in harsh environments. Designed for industrial use, they are also suitable for instrumentation, utilities, and laboratory applications. Full speed (480 Mbps) USB 2.0 support allows connectivity with modern computer technology.

The serial ports are configurable for RS-232, RS-422 and RS-485 (2-Wire & 4-Wire). Modbus support enables them to be used with a wide variety of industrial devices.

Each unit comes with DIN Rail and panel mounting hardware, giving maximum flexibility for your installation.

Specifications

Serial Technology

RS-232	TD, RD, RTS, CTS, DTR, DSR, DCD, GND
RS-422/485 4-Wire	TDA(-), RDA(-), TDB(+), RDB(+), GND
RS-485 2-Wire Connector	DATA A(-), DATA B(+), GND
Data Rate	921.6 Kbps
Isolation	2 kV – Port to Port
Surge Protection	+/- 1 kV Signal Ports
Industrial Bus Bias	Modbus ASCII/RTU 1 KΩ on receive lines in RS-422/485 mode

USB Technology

USB Compatibility	1.1 and 2.0
Speed	1.5, 12, and 480 Mbps
Connector	Type B High Retention (15 N / 3.4 lbs-force withdrawal)
Operating System	Windows 2000, XP (32/64 bit) Vista (32/64 bit), 7 (32/64 bit) 2003 & 2008 Server (32/64 bit)

Power

Source	External (Dual Input)
Power Connector	Terminal Block Locking Barrel Plug
Input Voltage	10 to 48 VDC
Power Consumption	USR602 – 3.5 Watts Maximum USR604 – 4.5 Watts Maximum

Indicators

Power	Green LED
TD / RD (Each Port)	Green / Amber LED

Mechanical

Dimensions USR602	13.8x3.5x8.8 cm (5.4x1.4x3.5 in)
Dimensions USR604	20.3x3.5x12.0 cm (8.0x1.4x4.7in)
Enclosure	IP 30, Metal
Weight	USR602 = 0.38 kg, USR604 = 0.68 kg
MTBF USR602	90,013 hours
MTBF USR604	51,098 hours
MTBF Calc. Method	MIL 217F Parts Count Reliability

Environmental

Operating Temperature	-40 to 80°C
Storage Temperature	-40 to 85°C
Operating Humidity	0 to 95% Non-condensing


Ordering Information

USR602	USB to Isolated Converter, 2 PORT
USR604	USB to Isolated Converter, 4 PORT
PS12VLB-INT-MED	12 VDC Power supply, locking barrel plug, international blades
MDR-20-24	DIN Rail, 24 VDC, 24 W Power Supply

Approvals / Certifications			
Emissions	FCC Class B, CISPR Class B (EN55022)		
CE	EN61000-6-1:2005	(Light Industrial)	
	EN61000-4-2:2008	(ESD)	+/-8kV Contact, +/-15kV Air
	EN61000-4-3:2006	(RI)	10V/m, 80-1000MHz; 3V/m, 1.3 to 2.7 GHz
	EN61000-4-4:2004	(EFT Burst)	+/-2kV DC ports; +/-1kV signal ports
	EN61000-4-5:2005	(Surge)	+/- 1 kV Signal Ports
	EN61000-4-6:2005	(CI)	3 VRMS, 0.15 to 80 MHz
	EN61000-4-8:2001	(Magnetic)	10A/m, 50Hz & 60Hz
Shock	IEC60068-2-27	50G peak, 11ms, 3 axes	
Vibration	IEC60068-2-6	10-500Hz, 4G, 3 axes	
Freefall (Drop)	IEC60068-2-32	10 total drops from sides, corner and edges, 1M	

What is Port to Port Isolation?


Most isolated USB to Serial Converters isolate the upstream device from the downstream device. This is fine when you are working with a single port unit. However, with multi-port devices, you need the additional protection offered by Port to Port Isolation. Simply put, Port to Port Isolation isolates the upstream device from the downstream devices as well as the downstream devices from each other. This is the only way you can be sure that ground loop or surge can not be transferred through Port 1 to a device connected to Port 2.

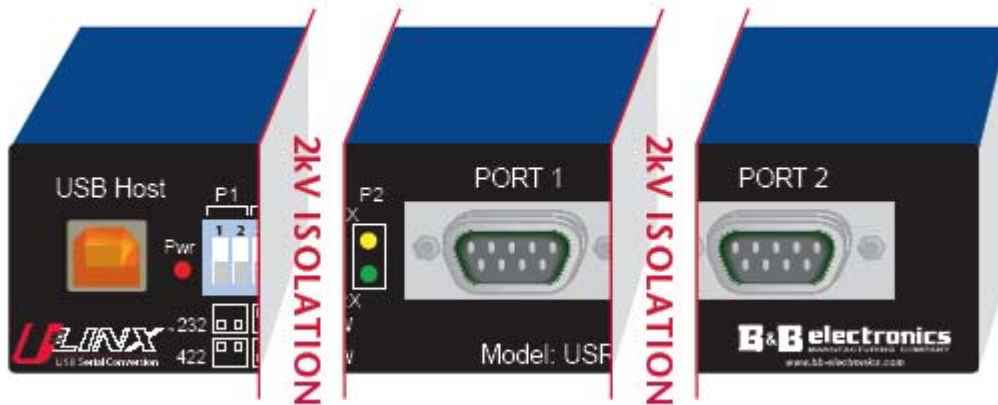

USR602 Dimensions

PRODUCT INFORMATION

B&B ELECTRONICS

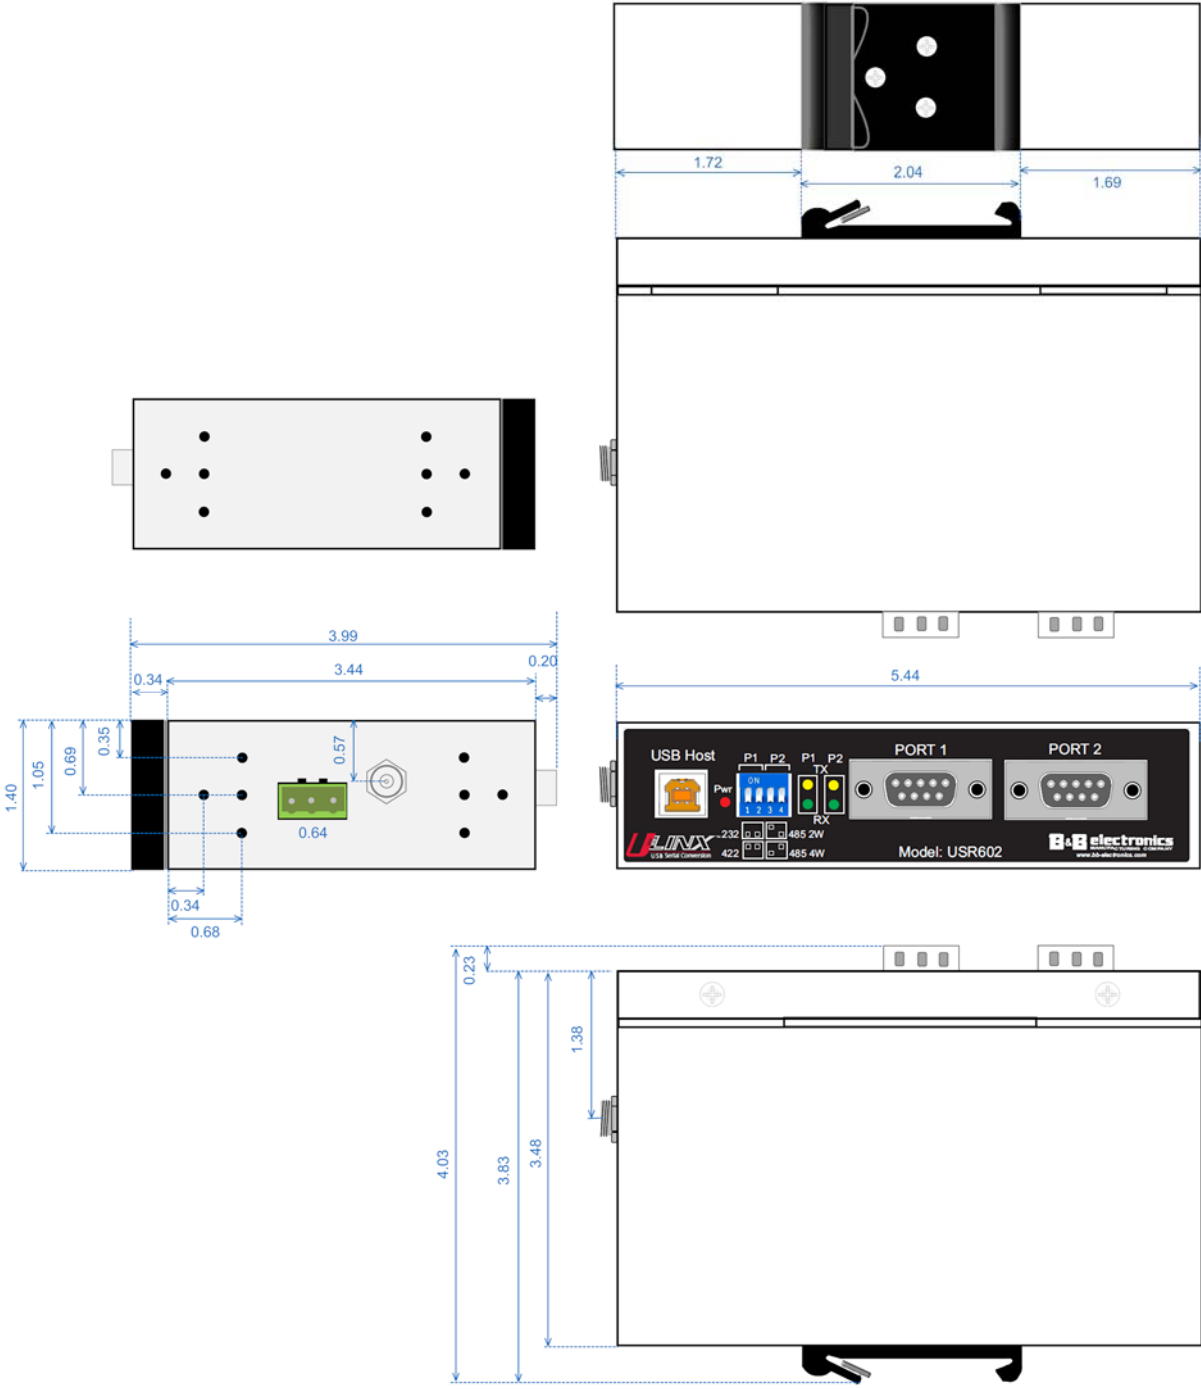

USR604 Dimensions

PRODUCT INFORMATION

B&B ELECTRONICS

