

Straight Blade Devices
15A, 125V, 2 Pole, 3 Wire Grounding
Insulgrip Plug

HUBBELL



Features

- Ribbed nylon housing is impact and chemical resistant
- VARI-SIZE adjustable cord clamp
- Fast lead assembly screws
- Beveled housing prevents snagging

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black and white nylon with anchor lock thumb screw	.230"-.720"(5.8-18.3)	783585173658	HBL5280C



Listings

UL Listed to UL498 File E1706
NEMA® WD-6 Compliant

Specifications

Housing/Cord Clamp	Nylon
Blade Holder	Nylon
Terminal Retainer	Clear Polycarbonate
Blades	.060 in. (1.5) Brass
Terminal Screws	#8-32 Brass , multiple drive
Terminal Clamp	Nickel plated steel
Assembly Screws	Nickel plated steel

Performance

Electrical


Current Interrupting Certified for current interrupting at full rated current
Dielectric Voltage Withstands 2,000V minimum

Mechanical

Cord Accomodation .230"-.720"(5.8-18.3)
Terminal Accommodation #18-10 AWG. Standed copper wire only
Terminal Identification Terminals identified in accordance with UL 498 and CSA

Environmental

Flammability UL 94 HB or better
IP Suitability IP20
Operating Temperatures Maximum continuous 75°C; minimum -40°C (w/o impact)

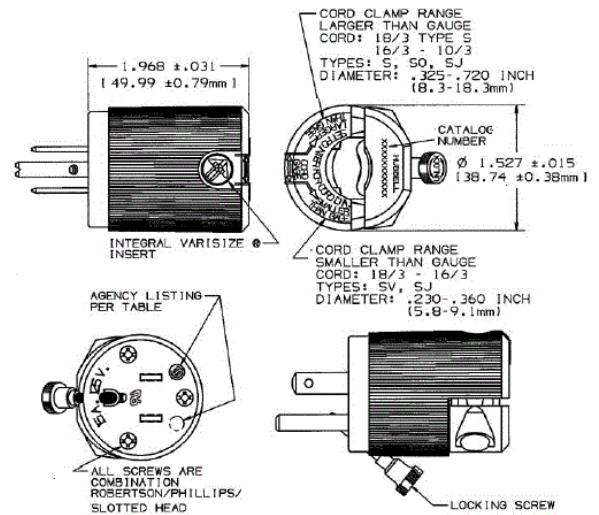

Resources

Customer Use Drawing
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

