

Twist-Lock® Devices 15A, 125V, 2 Pole, 2 Wire Non-Grounding Plug

HUBBELL



Features

- Ribbed nylon housing provides secure, impact and chemical resistant grip
- Superior cord grip design protects terminations from excess strain
- Integral VARI-SIZE insert accommodates a wide range of cord diameters (.22 to .72 in.)



15A 125V
NEMA L1-15P
UL Listed
0.5 HP



Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black and white nylon, polarized.	.230"-.720" (5.8-18.3)	783585178509	HBL7545C

Listings

Listed to UL 498
Fed. Spec W-C-596
Certified to CSA C22.2 No. 42

Specifications

Housing / Cord Clamp	Nylon
Terminal Retainer	Clear polycarbonate
Blades	Brass
Terminal Screws	#8-32 Brass (Phillips / Slotted / Robertson)
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Steel – nickel plated

Performance

Electrical


Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

Mechanical

Terminal Accommodation	#18 AWG - #10 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498

Environmental

Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C; Minimum -40°C (w/o impact)

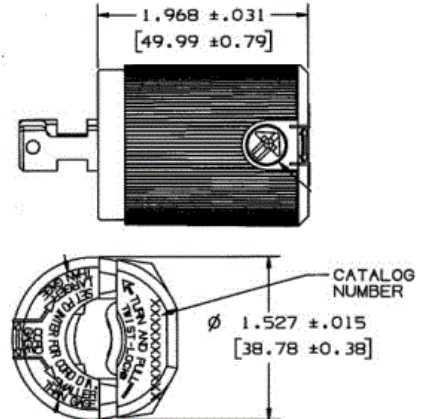

Accessories

Connector	HBL7506C
Duplex Receptacle	HBL7540
Single Receptacle	HBL7535
Nylon Flanged Receptacle	HBL7526C
Weatherproof Boot	HBL6023

Resources

Customer Use Drawing
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

