

Straight Blade Devices  
 15A, 125V, 2 Pole, 3 Wire Grounding  
 Hospital Grade Connector

# HUBBELL

## Features

- Beveled housing prevents snagging
- Powerful, offsetting cord grips clamp on individual conductors

## Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black and white nylon	.230"-.720"(5.8-18.3)	783585179506	HBL8219C



## Listings

UL Listed to UL498 File No. E2186  
 Certified to CSA, C22.2, No. 42 File 285  
 Fed. Spec. W-C-596

## Specifications

Housing	Nylon
Terminal Retainer	PBT
Contacts	.04" (1.0) Copper Alloy
Cord Clamp	Nylon
Terminal Screws	Brass
Terminal Clamp	Plated steel
Assembly Screws	Plated steel

## Performance

### Electrical


Current Interrupting Certified for current interrupting at full rated current  
 Dielectric Voltage Withstands 2000V AC minimum

### Mechanical

Product Identification Ratings are a permanent part of the device  
 Terminal Accommodation #18-10 AWG  
 Terminal Identification Terminals identified in accordance with UL 498 and CSA

### Environmental

Flammability UL 94 HB or better  
 IP Suitability IP20  
 Operating Temperatures Maximum continuous 75°C; minimum -40°C (w/o impact)

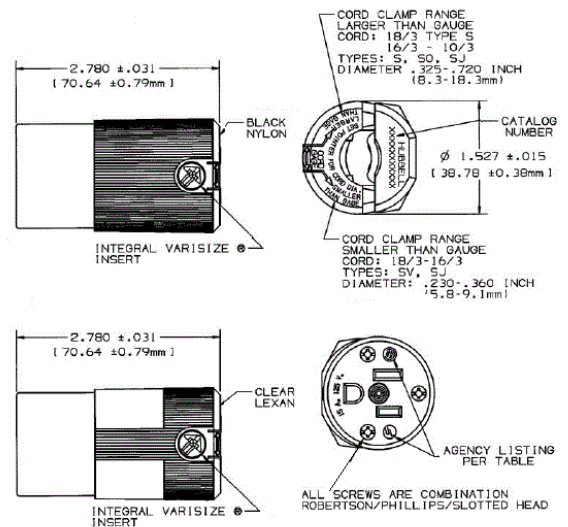

## Resources

Customer Use Drawing  
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

