

UC-7110/7112 Series

Mini RISC-based ready-to-run computer with 2 serial ports, dual LANs, SD



- > MOXA ART ARM9 32-bit 192 MHz processor
- > 16 or 32 MB RAM
- > 8 or 16 MB Flash ROM
- > Dual 10/100 Mbps Ethernet for network redundancy
- > 2 software-selectable RS-232/422/485 ports
- > 50 bps to 921.6 Kbps baudrate (non-standard baudrates supported)
- > SD socket for storage expansion
- > Built-in real-time clock (RTC) and buzzer
- > Pre-installed Linux Kernel 2.6 platform
- > -40 to 75°C wide temperature models available

The certification logos shown here apply to some or all of the products in this section. Please see the **Specifications** section or Moxa's website for details.



16

RISC-based Computers > UC-7110/7112 Series

Overview


The UC-7110/UC-7112 mini RISC-based communication platforms are ideal for your embedded applications. The computers come with 2 RS-232/422/485 serial ports and dual 10/100 Mbps Ethernet LAN ports to provide users with a versatile communication platform.

The UC-7110/UC-7112 use the ARM9 RISC CPU. Unlike the X86 CPU, which uses a CISC design, the ARM9's RISC design architecture and modern semiconductor technology provide the CPU with a powerful computing engine and communication functions, but without generating too much heat. The built-in 8 or 16 MB NOR Flash ROM and 16 or 32 MB SDRAM provide plenty of storage, and the SD socket on the UC-7112 provides the user with flexible storage expansion to run applications that generate a lot of data. The dual LAN ports built

into the ARM9 make the UC-7110/UC-7112 ideal communication platforms for some data acquisition and protocol conversion applications, and the 2 RS-232/422/485 serial ports allow you to connect a variety of serial devices.

The pre-installed μ CLinux operating system provides an open software operating system for software program development. This means that software written for desktop PCs can be easily ported to UC-7110/UC-7112 with a GNU cross compiler, so that you will not need to spend time modifying existing software code. The operating system, device drivers, and your own software can all be stored in the UC-7110/UC-7112's flash memory.

Appearance

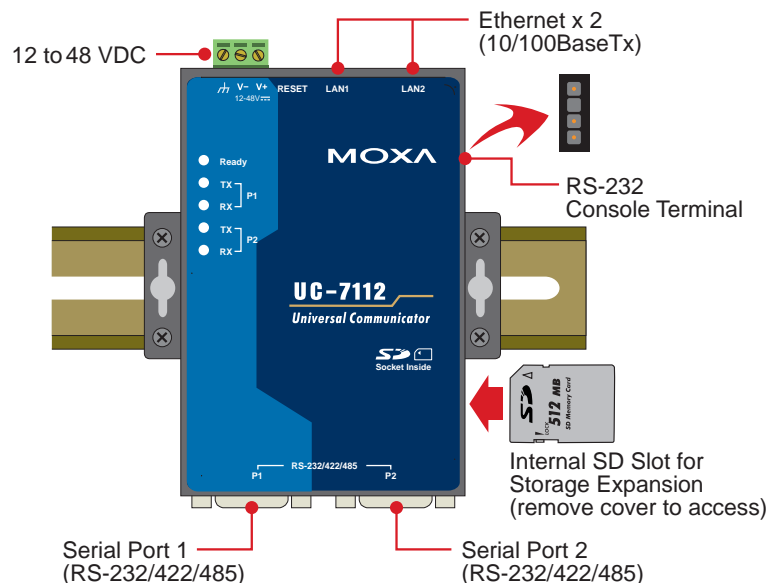

Hardware Specifications

Computer

CPU: MOXA ART ARM9 32-bit RISC CPU, 192 MHz

OS (pre-installed): µClinux or Linux

DRAM:

UC-7110/UC-7112: 16 MB (32 MB for ODM)

UC-7112 Plus: 32 MB onboard (64 MB for ODM)

Flash:

UC-7110/UC-7112: 8 MB onboard (16 MB for ODM)

UC-7112 Plus: 16 MB onboard

Storage Expansion: SD socket (UC-7112 and UC-7112 Plus only)

LAN Interface

Ethernet: 10/100 Mbps x 2, RJ45 connectors

Magnetic Isolation Protection: 1.5 KV built-in

Serial Interface

Number of Ports: 2

Serial Standards: RS-232/422/485, software-selectable

Connectors: DB9 male

ESD Protection: 15 KV for all signals

Console Port: RS-232, 3-wire (Tx, Rx, GND), pin-header

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF, ADDC™ (automatic data direction control) for RS-485

Baudrate: 50 bps to 921.6 Kbps (non-standard baudrates supported; see user's manual for details)

Serial Signals

RS-232: Tx, Rx, DTR, DSR, RTS, CTS, DCD, GND

RS-422: Tx+, Tx-, Rx+, Rx-, GND

RS-485-4w: Tx+, Tx-, Rx+, Rx-, GND

RS-485-2w: Data+, Data-, GND

LEDs

System: OS Ready x 1

LAN: 10M/Link x 2, 100M/Link x 2 (on the connector)

Serial: Tx, Rx (2 of each)

Physical Characteristics

Housing: Aluminum (1 mm)

Weight: 190 g

Dimensions: 77 x 111 x 26 mm (3.03 x 4.37 x 1.02 in)

Mounting: DIN-Rail, wall

Environmental Limits

Operating Temperature:

Standard Models: -10 to 60°C (14 to 140°F)

Wide Temp. Models: -40 to 75°C (-40 to 167°F)

Operating Humidity: 5 to 95% RH

Storage Temperature:

Standard Models: -20 to 80°C (-4 to 176°F)

Wide Temp. Models: -40 to 85°C (-40 to 185°F)

Power Requirements

Input Voltage: 12 to 48 VDC

Power Consumption: 340 mA @ 12 VDC (4.5 watts)

Regulatory Approvals

EMC: CE (EN55022 Class A, EN61000-3-2 Class A, EN61000-3-3, EN55024), FCC (Part 15 Subpart B, CISPR 22 Class A)

Safety: UL/cUL (UL60950-1, CSA C22.2 No. 60950-1-03), TÜV (EN60950-1)

Reliability

Alert Tools: Built-in buzzer and RTC (real-time clock)


Automatic Reboot Trigger: Built-in WDT (watchdog timer)

Warranty

Warranty Period: 5 years


Details: See www.moxa.com/warranty

Dimensions

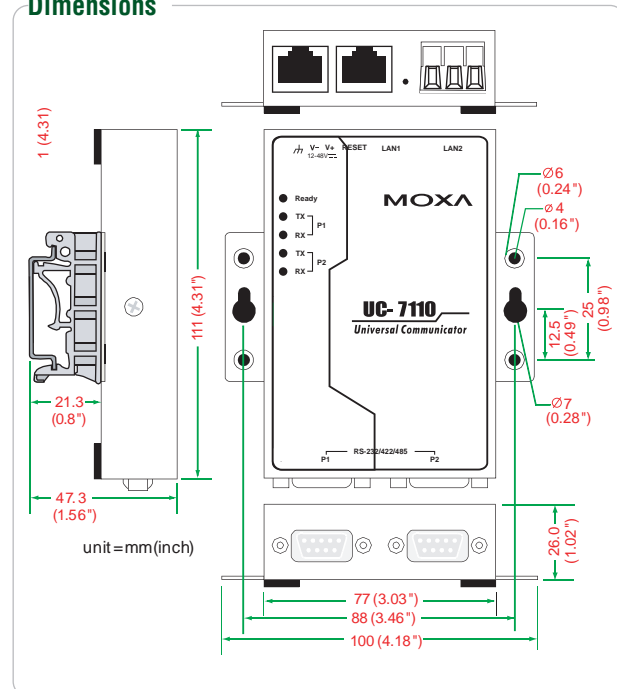


Pin Assignment

DB9 male connector




PIN	RS-232	RS-422/485-4w	RS-485-2w
1	DCD	TxD-(A)	-
2	RxD	TxD+(B)	-
3	TxD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	-	-
7	RTS	-	-
8	CTS	-	-

Serial console port



H/W Block Diagram

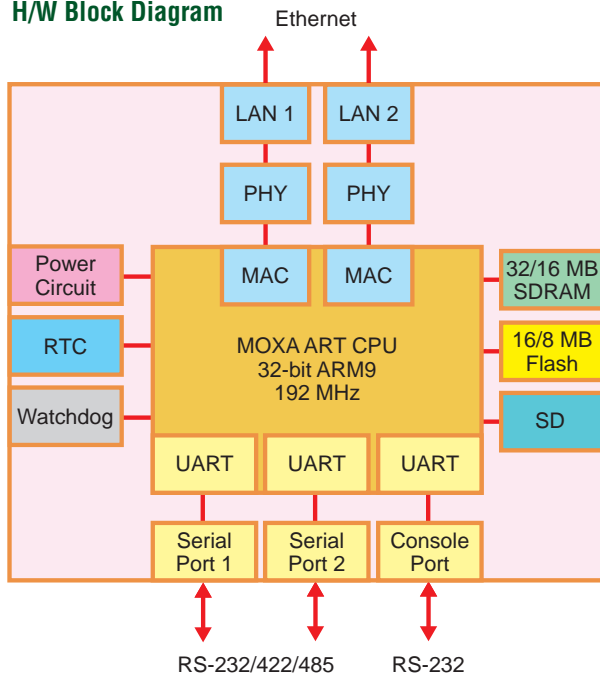

Software Specifications

µClinux

Kernel Version: 2.6.19

Protocol Stack: TCP, UDP, IPv4, SNMP V1, ICMP, ARP, HTTP, CHAP, PAP, DHCP, NTP, NFS, SMTP, Telnet, FTP, PPP, PPPoE

File System: JFFS2 (on-board flash)

System Utilities: msh, busybox, tinylogin, telnet, ftp

Supporting Services and Daemons:

telnetd: Telnet Server daemon

ftpd: FTP server daemon

Boa: Web server daemon

pppd: dial in/out over serial port daemon & PPPoE

snmpd: snmpd agent daemon

inetd: TCP server manager program

Application Development Environment:

Moxa Linux API Library for device control

Linux Tool Chain:

Arm-elf-gcc: C/C++ PC Cross Compiler

µClibc: POSIX Standard Library

Linux

Kernel Version: 2.6.9

Protocol Stack: TCP, UDP, IPv4, SNMP V1/V3, ICMP, IGMP, ARP, HTTP, CHAP, PAP, SSH 1.0/ 2.0, SSL, DHCP, NTP, NFS, SMTP, Telnet, FTP, PPP, PPPoE

File System: JFFS2 (on-board flash)

System Utilities: bash, busybox, tinylogin, telnet, ftp, scp

Supporting Services and Daemons:

telnetd: Telnet Server daemon

ftpd: FTP server daemon

sshd: Secure shell server

Apache: Web server daemon, supporting PHP and XML

OpenVPN: Virtual private network service manager

iptables: Firewall service manager

pppd: dial in/out over serial port daemon & PPPoE

snmpd: snmpd agent daemon

inetd: TCP server manager program

Application Development Environment:

Moxa Linux API Library for device control

Linux Tool Chain: Gcc, Glibc, GDB

Ordering Information

Available Models

UC-7110-LX: Mini RISC-based embedded computer with 2 serial ports, dual LANs, µClinux OS (standard operating temperature: -10 to 60°C)

UC-7112-LX: Mini RISC-based embedded computer with 2 serial ports, dual LANs, SD, Linux 2.6 OS (standard operating temperature: -10 to 60°C)

UC-7112-LX Plus: Mini RISC-based embedded computer with 2 serial ports, dual LANs, SD, µClinux OS (standard operating temperature: -10 to 60°C)

UC-7110-T-LX: Mini RISC-based embedded computer with 2 serial ports, dual LANs, µClinux OS (wide operating temperature: -40 to 75°C)

Package Checklist

- UC-7110 or UC-7112 computer
- Ethernet cable: RJ45 to RJ45 cross-over cable, 100 cm
- CBL-4PINDB9F-150: 4-pin pin header to DB9 female console port cable, 150 cm
- Universal power adaptor (includes terminal block to power jack converter)
- Document and Software CD
- Quick Installation Guide (printed)
- Warranty Card