

Twist-Lock® Devices

30A, 4 Pole, 5 Wire Grounding, 240/415 VAC, 3 Phase Y Insulgrip® Receptacle

HUBBELL

Features

- High-impact, abuse-resistant nylon face
- Wire restraint recess for both back and side wiring, greatly reduces the possibility of loosening the terminal connection
- Face color coding by voltage facilitates locating and mating of proper devices
- All-brass mounting and grounding system provides a lower resistance ground path and greater resistance to corrosion



30A 3ØY
240/415V AC
NEMA L26-30R
UL/CSA



Ordering Information


Description	Device Color	UPC Number	Catalog Number
Black Nylon	Black	783585580357	HBL2800

Listings

Listed to UL 498
Fed. Spec. W-C-596
Certified to CSA C22.2 No.42

Specifications

Face	Nylon
Base	Glass-Reinforced thermoplastic polyester (RTP)
Contacts	Brass
Terminal Screws	#10-32 Brass
Mounting Strap	Brass

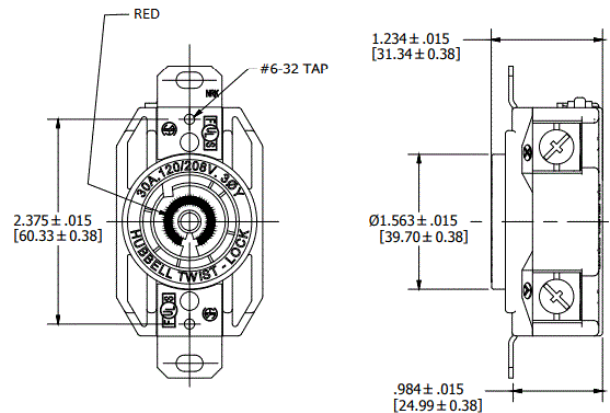

Performance

Electrical	
Current Interrupting	Certified at full rated current Electrical
Dielectric voltage	2,000V minimum
Mechanical	
Terminal Accommodation	#16 - #8 AWG stranded
Terminal Identification	Terminals identified in accordance with UL498
Environmental	
Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75C Minimum -40C (w/o impact)

Complementary Products

Wallplate or Weatherproof Cover Plug	1.60" Opening HBL2801
--------------------------------------	--------------------------

Online Resources

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

